

RINNOVA LIGHT 24 S
RINNOVA LIGHT 28 S
RINNOVA LIGHT 32 S

RinNova Light

STANDARD EFFICIENCY
COMBINATION BOILER

Standard efficiency combination boiler



RinNova Light

RinNova Light is the wall-mounted boiler for heating and the production of DHW. It is available with a sealed chamber with a complete output range (**24, 28 and 32 kW**) New RinNova is suitable for any house, from a villa to a small apartment.

Biasi has developed an **innovative digital control panel (improved safety by combustion control)**, a simple user interface with a list of useful information for the user as well as immediate programming procedures to be used by the installer.

This new and modern design and the compact dimensions of the whole range makes RinNova Light suitable to be installed in any environment.



Boiler control panel

Control Panel

Winter/Summer/Off selector

Heating temperature regulator

DHW temperature regulator

Analog pressure reading

Screen display of DHW and heating temperature

Display of fault diagnostics, lockout conditions and fault log




Base remote control

Remote control and thermoregulation

The new remote control (optional) allows the boiler to be controlled by customising its operation depending on different requirements.

The ambient temperature is easy to set using two keys. By connecting the external probe directly to the boiler you can benefit from climate regulation. RinNova Light boiler will adjust the heating request towards the boiler according to external climatic conditions, ensuring the desired ambient temperature is reached without any wastage and optimising consumption. The use of climate regulation also produces a rise in the regulation efficiency, increasing the value of your home.

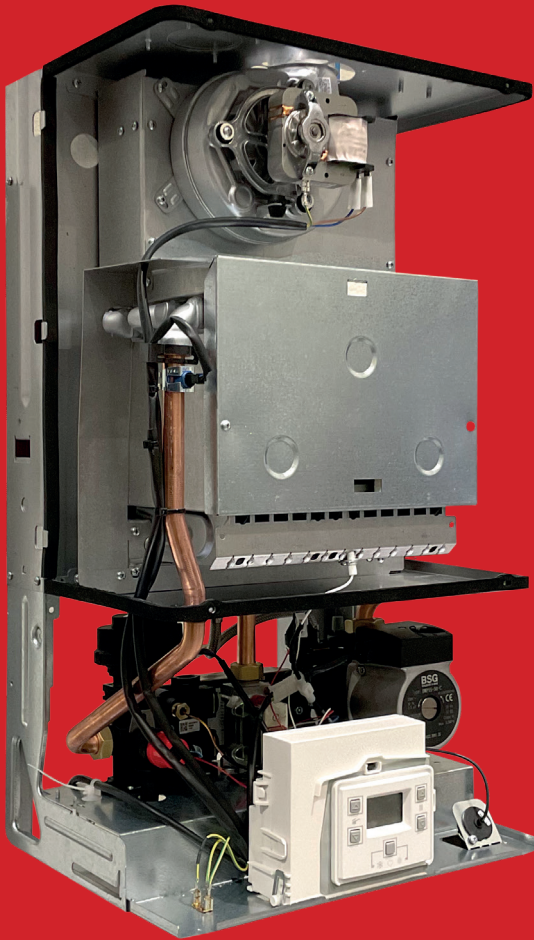

Main features:

High efficiencies (sealed chamber model ★★★ conforming to Efficiency Directive 92/42 EEC and Legislative Decree 311/06)

High circulation, laminar primary copper heat exchanger

DHW exchanger with stainless steel plates

Protection rating IPX5D (sealed models)

Integration with BIASI solar system by means of solar kit

Innovative digital control panel with graphic interface and keys

Analog pressure reading

Provision for remote control and external probe

Plastic hydraulic group



DHW ★★★ EN 13202

Optional solar kit



Integration with the solar kit

RinNova Light can be easily combined with a solar system using the BIASI solar kit. Quick and easy to install, it does not require electrical parts and allows integration of the solar system with the boiler to be optimised, so that intervention only takes place when necessary to ensure the required comfort temperature.

★★★ (Efficiency Directive 92/42 EEC)

RinNova Light is a very efficient boiler. The primary copper heat exchanger with five countercurrent pipes makes the entire BIASI range stand out in the market. The heat output modulation ensures low gas consumption and optimizes operation on the basis of the requirements for heating and DHW.

Included in the supply

- Boiler supporting bracket and cardboard template

Technical data

		RinNova Light		
		24 S	28 S	32 S
Nominal heating/d.h.w. heat input	kW	25,5	29	31,2
Minimum heat input (Hi) for heating	kW	11	14	14
Minimum d.h.w heat input (Hi)	kW	11	14	14
Maximum output power for heating/d.h.w	kW	23,7	27,1	29,1
Minimum output power for heating	kW	9,8	12,6	12,6
Minimum output power for d.h.w	kW	9,8	12,6	12,6
Nominal efficiency 60 / 80 °C	%	93,1	93,4	93,3
Min. efficiency 60 / 80 °C	%	89,2	90,2	90,2
Efficiency At 30 % of load	%	92,3	92,5	92,3
Heat loss at the chimney with burner operating	Pf (%)	6,4	6,2	6,2
Heat loss at the chimney with burner operating	Pfbs (%)	0,2	0,2	0,2
Heat loss towards the environment through the casing with the burner operating	Pd (%)	0,6	0,4	0,5
Energy efficiency		***	***	***
Methane G20	m³/h	2,7	3,07	3,30
Propane G31	kg/h	1,98	2,25	2,42
Adjustable temperature (heating)	°C	38÷85	38÷85	38÷85
Max. operating temp.	°C	90	90	90
Maximum pressure	kPa	300	300	300
Minimum pressure	kPa	30	30	30
Available pressure difference (at 1000 l/h) *At minimum useful power	kPa	20,4	21	21
Temp. Minimum - maximum (domestic hot water)	°C	35÷60	35÷60	35÷60
Maximum pressure	kPa	1000	1000	1000
Minimum pressure	kPa	30	30	30
Maximum flow rate				
(ΔT=25 K)	l/min	13,6	15,5	16,7
(ΔT=35 K)	l/min	9,7	11,1	11,9
Minimum flow rate	l/min	2,5	2,5	2,5
specific d.h.w flow rate (ΔT=30 K)*... *Reference standard EN 625	l/min	11,2	13,1	14,1
Max. flue gas temperature at 60/80 °C	°C	146	144	148
Max. flue gas mass flow rate	kg/s	0,0188	0,0205	0,0207
Min. flue gas mass flow rate	kg/s	0,0223	0,0228	0,0228
Max. air mass flow rate	kg/s	0,0183	0,0199	0,0201
Min. air mass flow rate	kg/s	0,0221	0,0225	0,0225
*Value refer to tests with 80 mm 1 + 1 twin pipe discharge Methane gas G20 and heat input in d.h.w. Mode				
Voltage	V	230	230	230
Frequency	Hz	50	50	50
Power consumption at nominal heat input	W	132	150	150
Power consumption at minimum heat input	W	130	148	148
Power consumption in stand-by	W	3	3	3
Degree of protection		IPX5D	IPX5D	IPX5D
Height	mm	703	703	703
Width	mm	400	400	400
Depth	mm	325	325	325
Weight	kg	31,1	31,8	31,8
Water content in boiler	dm³	2	2	2
Boiler type		B22 C12 C32 C42 C52 C62 C82	B22 C12 C32 C42 C52 C62 C82	B22 C12 C32 C42 C52 C62 C82
Coaxial air/flue gas duct ø	mm	60/100	60/100	60/100
Twin pipe air/flue gas ø	mm	80/80	80/80	80/80
Coaxial air/flue gas duct to roof ø	mm	80/125	80/125	80/125

Cod. 4823.0803.00.EN